WM-12P <

DEUTSCH | DEUTSCH DT, DEUTSCH DTM

TE Internal #: WM-12P Automotive Connector Locks & Position Assurance, Secondary Lock, Orange, PBT, 12 Position, -55 – 125 °C [-67 – 257 °F], DEUTSCH DT

View on TE.com >



Connectors > Automotive Connectors > Automotive Connector Accessories > Automotive Connector Locks & Position Assurance >

DEUTSCH DTM Wedgelocks



Connector & Contact Retention Accessory Type: Secondary Lock

Primary Product Color: Orange

Primary Product Material: **PBT**

Number of Positions: 12

Sealable: No

All DEUTSCH DTM Wedgelocks (17)

Features

Product Type Features

Connector & Contact Retention Accessory Type	Secondary Lock			
Sealable	No			
Configuration Features				
Number of Positions	12			
Body Features				
Primary Product Color	Orange			
Primary Product Material	PBT			
Usage Conditions				
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]			
Industry Standards				
UL Flammability Rating	UL 94HB			
Packaging Features				
Packaging Method	Box			
Other				

C For support call+1 800 522 6752

07/08/2023 02:03AM | Page 1

Automotive Connector Locks & Position Assurance, Secondary Lock, Orange, PBT, 12 Position, -55 – 125 °C [-67 – 257 °F], DEUTSCH DT

Serviceable



Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2023 (233) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC

Yes

Free

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Automotive Connector Locks & Position Assurance, Secondary Lock, Orange, PBT, 12 Position, -55 – 125 °C [-67 – 257 °F], DEUTSCH DT






Also in the Series DEUTSCH DT



Automotive	Connector	Caps a	COVCIS	
(107)				


Position Assurance(74)

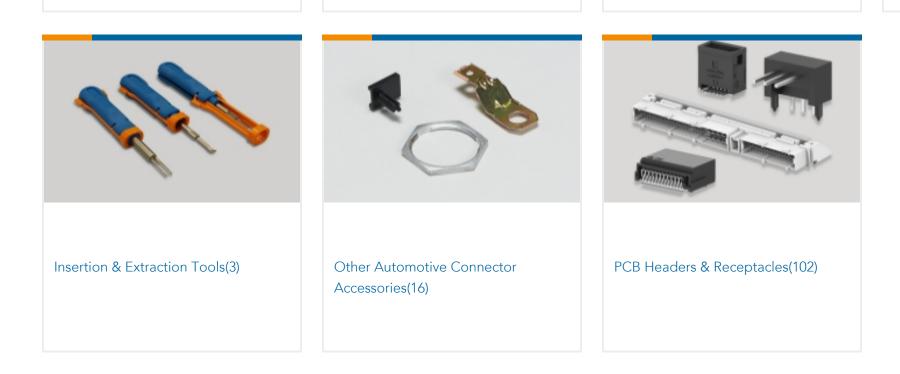

Also in the Series DEUTSCH DTM

Automotive Connector Locks & Position Assurance, Secondary Lock, Orange, PBT, 12 Position, -55 – 125 °C [-67 – 257 °F], DEUTSCH DT



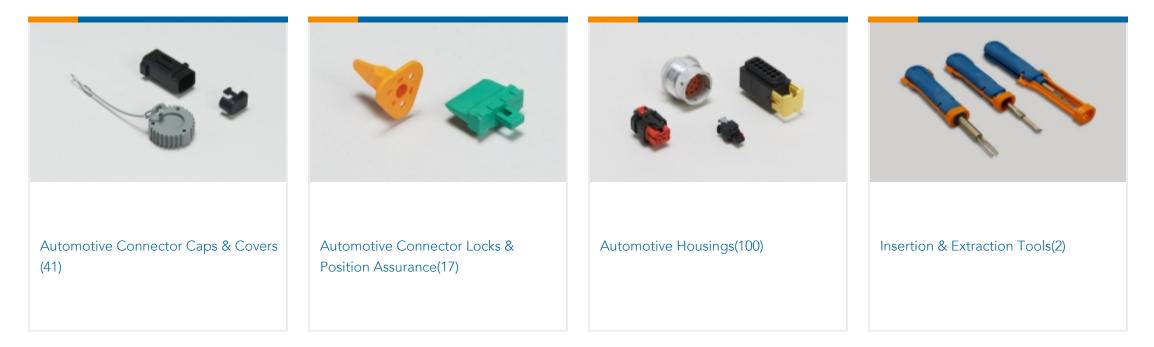



PCB Headers & Receptacles(36)

Customers Also Bought



DEUTSCH DTM Housings

DEUTSCH DTM Wedgelocks

12POS,STAMPED 20,PIN HSG ASSY,

SLD,COD 1

Documents

Product Drawings WEDGE LOCK, 12P, REC, ORG, DTM

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_WM-12P_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_WM-12P_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_WM-12P_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Automotive Connector Locks & Position Assurance, Secondary Lock, Orange, PBT, 12 Position, -55 – 125 °C [-67 – 257 °F], DEUTSCH DT



Datasheets & Catalog Pages

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications DEUTSCH DTM Series Connector System

English